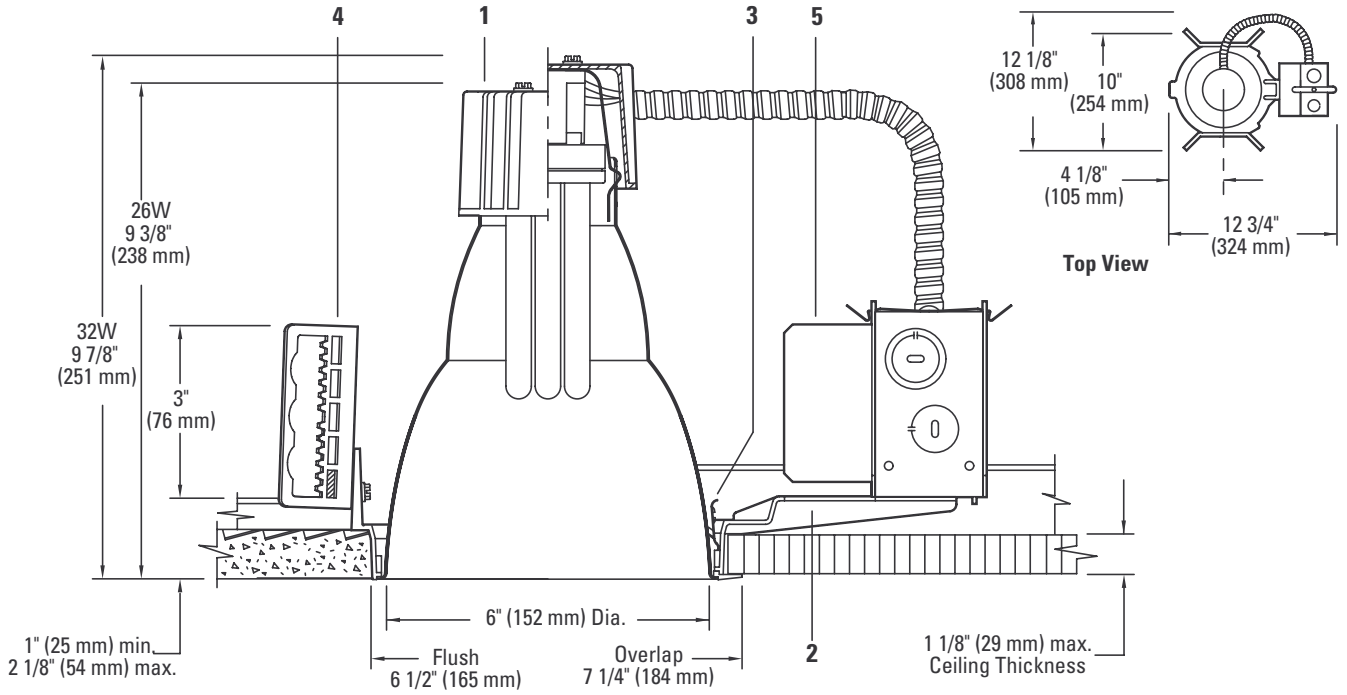

8021 series trim shown with 6132BU frame (each sold separately)

Ceiling Cutout: 6 9/16" (167 mm) Dia.

Frame-In Kit		Compatible Reflector Trims			
		Downlights		Wall Washers	
6132BU	Electronic 120V-277V 26 or 32W Triple Tube 4-Pin (Amalgam)	**8021** **8031** **8091CB** **8091**	Open, Vertical Lamping Open, Horizontal Lamping Louvered, Horizontal Lamping Lensed, Horizontal Lamping	**8021WW** **8081** **8046**	Open, Vertical Lamping Open, Horizontal Lamping Lensed, Horizontal Lamping

Features

1. **Socket Cup:** Die-cast aluminum cup effectively dissipates heat and positions lamp holder. Snaps onto reflector neck to assure consistently correct optical alignment without tools.
2. **Mounting Frame:** Die-cast aluminum for dry or plaster ceilings.
3. **Retaining Springs:** Precision-tooled steel friction springs secure reflector to mounting frame for quick, tool-less installation.
4. **Mounting Brackets:** 16 GA. steel adjust from inside of fixture. Use 3/4" or 1 1/2" lathing channel, 1/2" EMT, or optional mounting bars.
5. **Ballast/J-Box:** Electronic 120V - 277V. UL listed for through branch circuit wiring with max of (8) No. 12 AWG, 90°C supply conductors. Outboard mounted to reduce heat transfer and maintain lamp efficacy and life. Service from below without tools.

Note: For ballast complete electrical data and latest lamp/ballast compatibility refer to **"Ballast"** specification sheet.

Options & Accessories

Emergency Option: 6132BUEM

Dimming Options:

6132BCU **6132BJUM7** **6132BJ1MX** **6132BJ2MX**

Mounting Bars: **1950** - 18" Set of (2)
1951 - 27" Set of (2)

T-Bar Anchor Clips: **1956** - Set of (4), for use with above

Labels

UL listed for damp locations. I.B.E.W.

Job Information **Type:**

Job Name:

Cat. No.:

Lamp(s):

Notes:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • E0708